

**Schools**

**Parks**

**Day Cares**

**Preschools**

**Residential**

**Corporate**

# The Playground Surfacing Specialists

## PLAYGROUND TILES

*Get us under YOUR feet*



[www.dinoflex.com](http://www.dinoflex.com)



DINO FLEX Manufacturing LTD.®



## KID TESTED, KID APPROVED

Our unique, self-aligning, interlocking system creates an easy and accurate installation. The interlock system provides a secure installation discouraging vandalism.


# INTERLOCK system

Self-Aligning

Easy Installation

Discourages Vandalism

No Adhesive Required

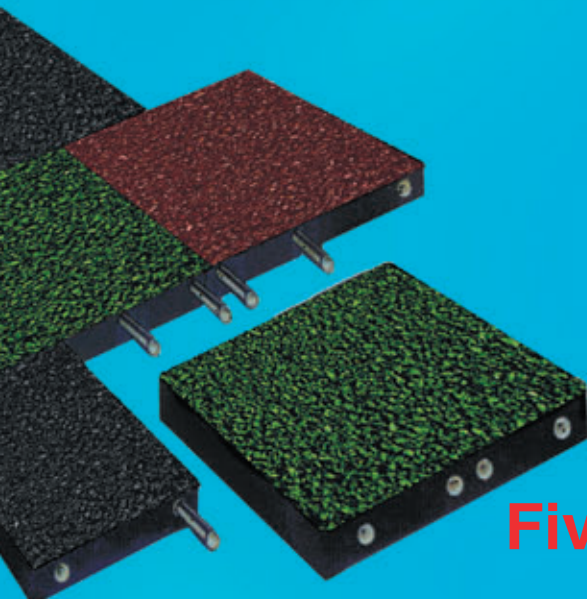

## benefits FEATURES

IMPACT ABSORBING

SLIP RESISTANT

INTERLOCK SYSTEM

EASY TO INSTALL

MINIMAL MAINTENANCE

WATER PERMEABLE

WHEELCHAIR FRIENDLY

MEETS ADA STANDARDS

MEETS CPSC REQUIREMENTS

MEETS ASTM F1292

QUALIFIES FOR LEEDS CREDITS

## Five-Year Limited Warranty





## the rubber tile advantage:

- Physical properties are controlled and consistent throughout play area
- Easy to repair and maintain
- Simple to install – no special equipment required
- Uncomplicated packaging and transportation
- Easy to enlarge or modify play area
- Use different colors to create unique designs and play zones
- Impact attenuation equal throughout

## WELCOME TO THE WORLD OF

# PlayTiles®

DINOFLEX'S world of PlayTiles is the most exciting and innovative concept in playground surfacing. Turn your playground into an accessible play area that promotes learning, creativity, interactive play, and above all FUN!

### HOPSCOTCH SET



### FOUR SQUARE SET



### ALPHABET SET



### TRAFFIC SET



### SPACE SET



### ANIMAL SET




Sets available in colors shown only

Get us under YOUR feet

# playground COLOUR OPTIONS

specifications & technical data

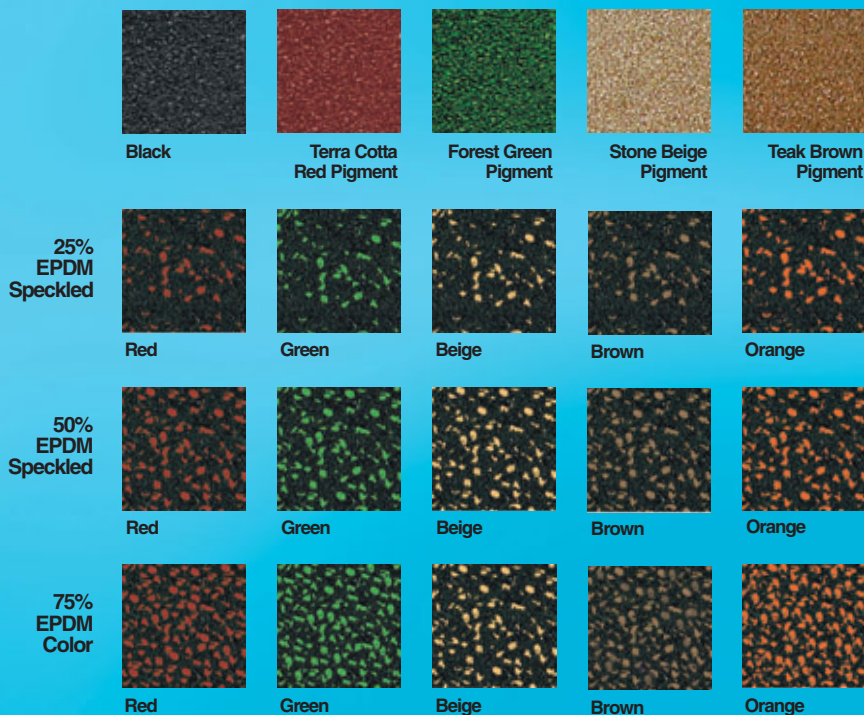

PLEASE SELECT COLOR BASED ON ACTUAL SAMPLE

<b>Dimensions</b>	<b>Available In:</b> 24" (610 mm) x 24" (610 mm) 19 1/2" (495 mm) x 19 1/2" (495 mm)
	<b>Tile Thickness</b> <b>Fall Height</b> 1 1/2" (38mm)        4 ft (1.2m) 2 1/4" (57mm)        6 ft (1.8m) 3 1/2" (89mm)        10 ft (3m)
<b>ASTM F1292 Requirements</b>	<b>Results:</b> Passed Shock-absorbing properties tested between 30°F - 120°F (0°C - 50°C). G-Max and HIC measured may not exceed 200 and 1000, respectively, at a given fall height.
<b>ASTM C1028 Slip Resistance</b>	<b>Results:</b> Passed Dry .67, Wet .64
<b>ASTM E648 Flammability Performance</b>	<b>Results:</b> <b>Class I</b> = If flame retardant is added. Please call for pricing

## accessories



REPRESENTED BY:

Dinoflex Europe  
 P.O. Box 356    Tel: +31(0) 35-6782373  
 8160 AJ Epe    Fax: +31(0) 35-6782372  
 www.dinoflex.nl    info@dinoflex.nl  
 Holland




DINOFLEX Manufacturing LTD. ®

THE RUBBER FLOORING SPECIALISTS

5590 - 46th Avenue SE  
 PO Box 3309  
 Salmon Arm, BC  
 V1E 4S1 CANADA

www.dinoflex.com

TEL (250) 832-7780  
 FAX (250) 832-7788  
 TOLL FREE TEL 1-877-713-1899  
 EMAIL sales@dinoflex.com



Get us under YOUR feet.