

# Recycled Rubber Sport Mat Flooring



FITNESS CENTERS RECREATION FACILITIES GOLF COURSES SKI RESORTS ICE ARENAS




**DINO FLEX<sup>®</sup>**  
RECYCLED RUBBER SURFACES




# standard colors

RED GREEN BLUE GREY BEIGE BROWN

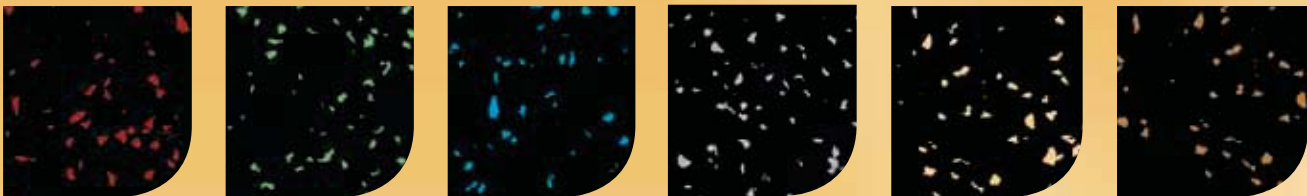


10%  
Color

#5118 #5119 #5120 #5121 #5122 #5111

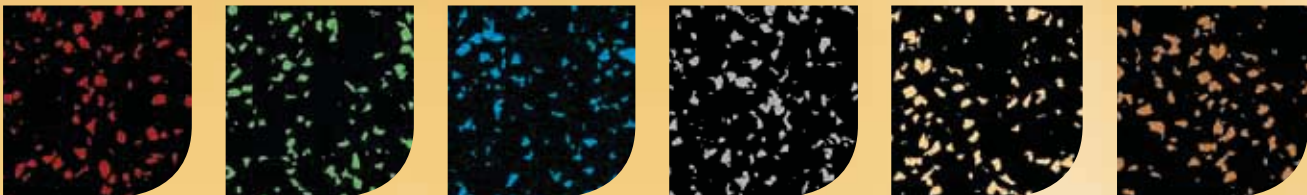

30%  
Color


#5318 #5319 #5320 #5321 #5322 #5311

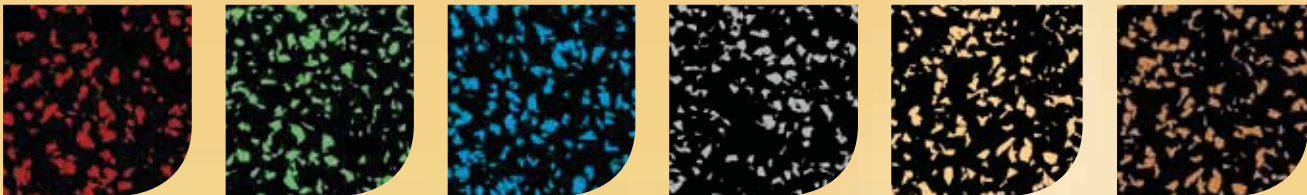

50%  
Color

#5518 #5519 #5520 #5521 #5522 #5511

## two-color

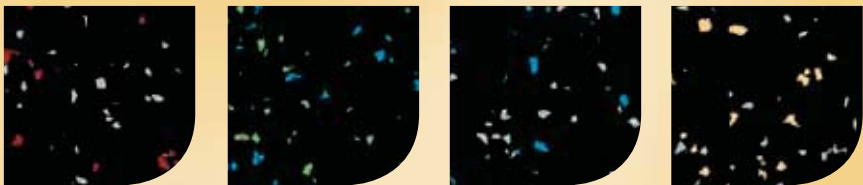


#5125 #5134 #5145 #5148



BEIGE #214F06 BLUE #214F5D GREEN #214FL3 GREY #214F05

## metro

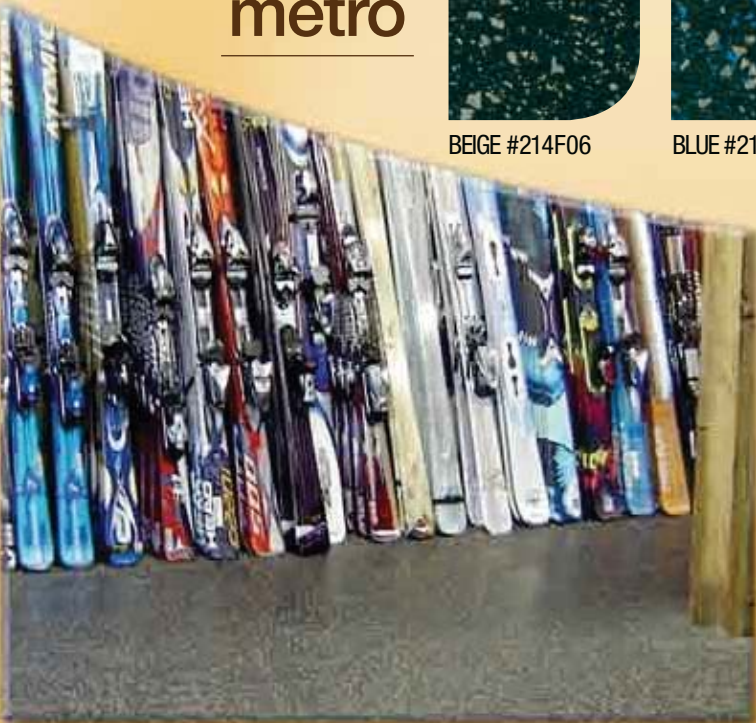

NOTE: Please select color based on actual samples.




## stone line


SEA STONE



BLUE  
#5004U7



TURQUOISE  
#5004U8



GREEN  
#5004U2


EARTH STONE



BEIGE  
#5004F6



ORANGE  
#5004F9



RED  
#5004H3

## decor collection



AZTEK EMPIRE  
#5304HE




DEEP SEA  
#5304HB



MAYAN SANDS  
#5314H4



INDEPENDENCE  
#5304HA



NIGHT SKY  
#5304U3



LUNAR SHOWERS  
#5314H9


NOTE: Please select color based on actual samples.

## Interlocking System - "Loose Lay" Flooring

DINOFLEX's in-house water jet cutter creates the precision cut, interlocking tiles resulting in a unified, seamless look. Installation costs are reduced because adhesives are not required.

DINOFLEX interlocking tiles are reversible, doubling the life expectancy of your floor.

**Straight edge tiles are also available for glue down applications where required.**

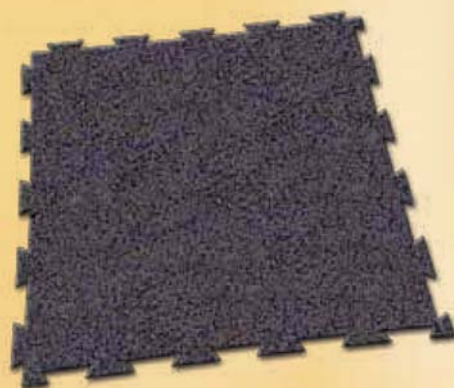




# granite flex

# elite line


RED

GREEN


GREY




TUSCANY GREY  
#014E7




GIBRALTAR GREY  
#014C5




SUNSET RED  
#014C4



TROPICAL GREEN  
#014C6



SAHARA BEIGE  
#014C9



MEDITERRANEAN  
BLUE #014C3

	#53P118	#53P119	#53P121
PLUS GREY			
	#54P425	#54P435	#54P4Q9
PLUS BEIGE			
	#54P426	#54P436	#54P448



NOTE: Please select color based on actual samples.





## Custom Colors


Create your own custom flooring by combining colors from our extensive palette. Available in square cut and interlocking tiles.

## Custom Design & Logos

Free your imagination! Design your own perfect floor – add color, shape, dimension, logos or borders. The choices are limitless!



Custom design your floor to suit both your aesthetic and practical needs. This area was custom designed as a Dry Training Area for the hockey off season.

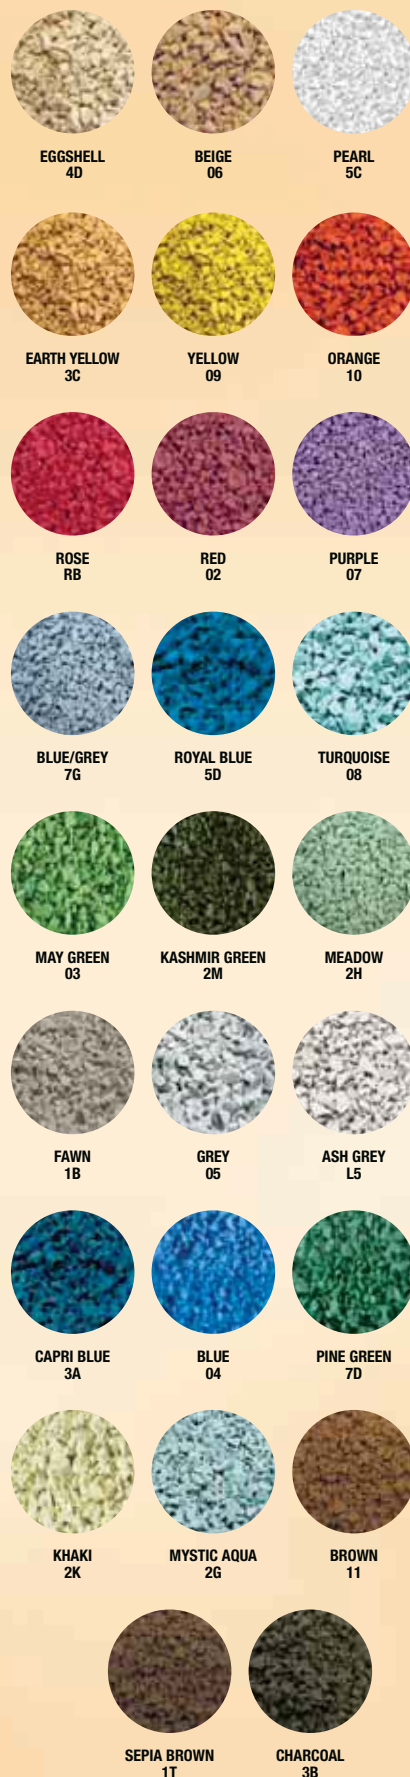

Colors shown are reproduced as closely as possible to actual product colors. Contact DINO FLEX for product samples.

## PHYSICAL PROPERTIES

TEST	DESCRIPTION	Standard Colors	Stone Line	Elite Line
AATCC 134-06	Electrostatic Propensity	POS 1.6 KV (up to 30% color only)	N/A	N/A
ASTM C423	Sound Absorption/Noise Reduction Coefficient	N/A	N/A	4mm 0.05 6mm 0.05
ASTM C501	Taber Abrasion (H-22)	0.8% wt. Loss	N/A	4% wt. Loss
ASTM D2047	Static Coefficient of Friction	Dry 1.04, Wet 1.05	Dry 0.81, Wet 0.90	Dry 0.85, Wet 1.01
ASTM D2240	Hardness Shore A Durometer	64 - 65 indentation	62 indentation	59 indentation
ASTM D3676	Density Foam Test	66.0 lbs/cu. ft.	77.7 lbs/cu. ft.	78.3 lbs/cu. ft.
ASTM D395B	Compression Set Under Force	90% to 96.3% Recovered	95.3% Recovered	94.7% Recovered
ASTM D412	Tensile Strength	290.2 lbs/sq. in.	292.2 lbs/sq. in.	186.1 lbs/sq. in.
ASTM D5116	Material Emissions -VOC	Pass	Pass	Pass
ASTM E492	Impact Sound Transmission	4mm - IIC 57 8mm - IIC 59	N/A N/A	4mm - IIC 57 8mm - IIC 59
ASTM F137-03	Flexibility	6mm Mandrel PASSES	N/A	N/A
ASTM F150 (NFPA 99)	Electrical Resistance: • Surface to Surface • Surface to Ground	5.4 x 10 <sup>10</sup> ohms (average) 2.3 x 10 <sup>10</sup> ohms (average)	N/A N/A	3.9 x 10 <sup>11</sup> ohms (average) 1.9 x 10 <sup>11</sup> ohms (average)
ASTM F1914-98	Short Term Indentation	.025 inch (6.0%) Loss	N/A	N/A
ASTM F1914-98	Residual Indentation	.007 inch (1.7%) Loss	N/A	N/A
ASTM F970	Static Load (125 lbs)	.00 inch (0.0%) residual compression	N/A	N/A
ASTM F970	Static Load (1000 lbs)	N/A	0.30 in (7.3%) residual compression	.042 in (10.6%) residual compression
ASTM F925	Chemical Resistance	No Change	No Change	No Change
ASTM G21	Mildew Resistance	No Mildew after 14 days	N/A	No Mildew after 28 days
CALIFORNIA 01350	Sport Mat Flooring meets the VOC Emission requirements as a low-emitting material in the Collaborative for High Performance Schools rating system (CHPS Designed & CHPS Verified). Also the testing requirements are met for USGBC LEED for Commercial Interiors and for New Construction and Major Renovation, IEQ Credit 4.3 Low-Emitting materials - Flooring Systems, Options 1 and 2.			

## 10 YEAR WARRANTY

## PRODUCT SPECIFICATIONS

PRODUCT	SIZE	STANDARD THICKNESS
Interlock Tile (Loose Lay)	37" x 37" = 9.5 ft <sup>2</sup> 94cm x 94cm - 0.88m <sup>2</sup>	5/16" (8mm), 3/8" (10mm), 1/2" (12mm) Tolerance of + 0.5mm
Square Cut Tile (Glue Down)	38" x 38" = 10.0 ft <sup>2</sup> 96.5cm x 96.5cm - 0.93m <sup>2</sup>	5/32" (4mm), 1/4" (6mm), 5/16" (8mm), 3/8" (10mm), 1/2" (12mm) Tolerance of + 0.5mm

Please Note: All measurements are subject to nominal variation.

P.O. Box 3309  
5590 - 46th Ave. S.E.  
Salmon Arm, B.C.  
V1E 4S1 CANADA

Tel: (250) 832-7780  
Toll-Free: 1-877-713-1899  
Email: info@dinoflex.com

**REPRESENTED BY:** Dinoflex Europe  
P.O. Box 356  
8160 AJ Epe (Holland)  
www.dinoflex.nl

Tel: +31 (0)35-6782373  
Fax: +31 (0)35-6782372  
info@dinoflex.nl

